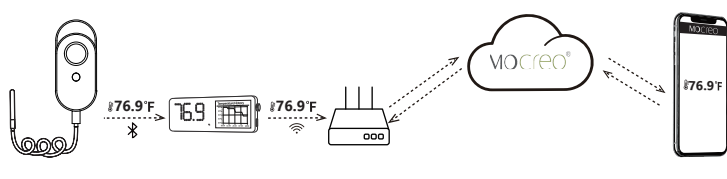
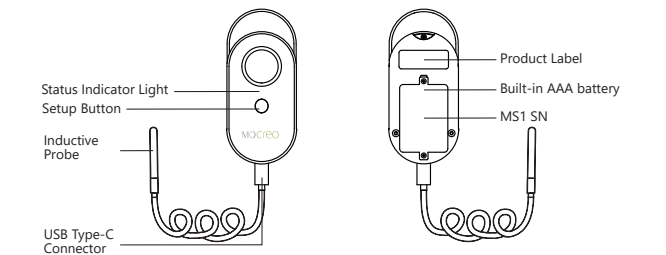
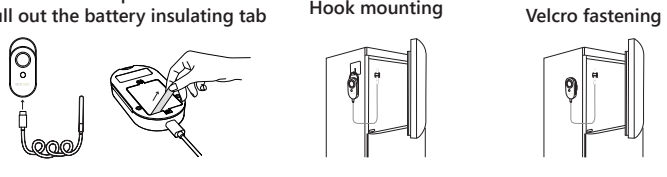


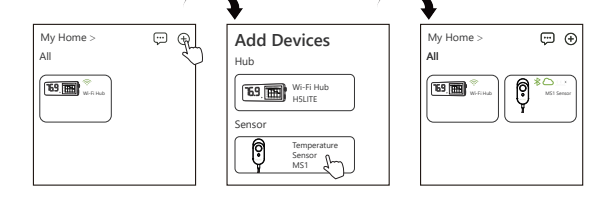


	<h3>Content</h3> <ul style="list-style-type: none"> <li>How the System Works..... 2</li> <li>Introduction..... 3</li> <li>What's in the Box..... 4</li> <li>Product Parameter..... 5</li> <li>Mounting..... 8</li> <li>Setup..... 9</li> <li>Troubleshooting.....12</li> <li>Customer Service.....13</li> <li>Precautions and Disclaimer.....14</li> <li>FCC Statement.....16</li> <li>Warranty.....19</li> </ul>	<h3>How the System Works</h3> 	<h3>Introduction</h3> <p>The MS1 is a wireless temperature sensor with an external probe, used to measure the ambient temperature, in spaces like refrigerators and freezers.</p> <p>Certain customers wish to remotely monitor their sensors, hence they integrate the MOCREO Hub. The Hub employs local Wi-Fi (2.4GHz only) or Ethernet to relay data from any range of sensors to the internet.</p>	<h3>What's in the Box</h3> <ul style="list-style-type: none"> <li>MS1 Sensor x1</li> <li>4.9ft Probe Cable x1</li> <li>Velcro x1</li> <li>Probe/Cable Clip x2</li> <li>User Manual x1</li> </ul>	<h3>Product Parameter</h3> 	<h3>Specifications</h3> <table border="1"> <tr><td>Model</td><td>MS1</td></tr> <tr><td>Wireless Connection</td><td>Bluetooth</td></tr> <tr><td>Communication Range</td><td>131 ft (40 m) (Open space, no obstructions)</td></tr> <tr><td>Dimensions</td><td>4.2 x 2.2 x 0.8 in</td></tr> <tr><td>Weight (including probe)</td><td>3.7 oz (105 g)</td></tr> <tr><td>Battery</td><td>3 x AAA battery (Non-rechargeable)</td></tr> <tr><td>Size of Stainless Steel Shell</td><td>0.24 in (6 mm) diameter</td></tr> <tr><td>Cable Length</td><td>4.9 ft (1.5 m)</td></tr> <tr><td>Cable Cross Section</td><td>0.16 x 0.05 in</td></tr> <tr><td>Probe Measuring Range</td><td>-40° - 221°F (-40° - 105°C)</td></tr> <tr><td>Temperature Accuracy</td><td>+0.9°F(14° - 185°F)</td></tr> </table>	Model	MS1	Wireless Connection	Bluetooth	Communication Range	131 ft (40 m) (Open space, no obstructions)	Dimensions	4.2 x 2.2 x 0.8 in	Weight (including probe)	3.7 oz (105 g)	Battery	3 x AAA battery (Non-rechargeable)	Size of Stainless Steel Shell	0.24 in (6 mm) diameter	Cable Length	4.9 ft (1.5 m)	Cable Cross Section	0.16 x 0.05 in	Probe Measuring Range	-40° - 221°F (-40° - 105°C)	Temperature Accuracy	+0.9°F(14° - 185°F)
Model	MS1																											
Wireless Connection	Bluetooth																											
Communication Range	131 ft (40 m) (Open space, no obstructions)																											
Dimensions	4.2 x 2.2 x 0.8 in																											
Weight (including probe)	3.7 oz (105 g)																											
Battery	3 x AAA battery (Non-rechargeable)																											
Size of Stainless Steel Shell	0.24 in (6 mm) diameter																											
Cable Length	4.9 ft (1.5 m)																											
Cable Cross Section	0.16 x 0.05 in																											
Probe Measuring Range	-40° - 221°F (-40° - 105°C)																											
Temperature Accuracy	+0.9°F(14° - 185°F)																											

<h3>Button Functions</h3> <table border="1"> <thead> <tr> <th>Indicator light status</th> <th>Button operation</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>The blue light remains steady</td> <td>Press and hold for 3s, then release</td> <td>Enter Setup mode</td> </tr> <tr> <td>The red light briefly illuminates and then extinguishes</td> <td>Press and hold for more than 15s, then release</td> <td>Restore default settings and restart</td> </tr> <tr> <td>The blue light flashes once</td> <td>Press the button once</td> <td>MS1 reports data</td> </tr> </tbody> </table>	Indicator light status	Button operation	Function	The blue light remains steady	Press and hold for 3s, then release	Enter Setup mode	The red light briefly illuminates and then extinguishes	Press and hold for more than 15s, then release	Restore default settings and restart	The blue light flashes once	Press the button once	MS1 reports data	<h3>Mounting</h3> <p>MS1 Sensor</p> <ul style="list-style-type: none"> <li>Insert the probe and pull out the battery insulating tab</li> <li>Hook mounting</li> <li>Adhesive + Velcro fastening</li> </ul> 	<h3>Setup</h3> <h4>1 Download MOCREO Smart App</h4> <p>Search for "MOCREO Smart" on Google Play/ App Store or scan the QR code below to download the MOCREO Smart App and register your MOCREO account on the app.</p> 	<h4>2 Add Device</h4> <p>Make sure Bluetooth is ON so you can add the device to the app.</p>  <p><b>Note:</b> The MS1 Sensor cannot operate independently; please complete the Hub Setup process before adding the Sensor.</p>	<h4>Add MS1 Sensor</h4> <p>Open the <b>MOCREO Smart</b> App, follow the instructions provided by the app, and complete the MS1 Sensor addition process.</p> 	<h3>Troubleshooting</h3> <h4>Sensor is offline</h4> <p><b>If you use H3 / H5:</b> Open the app, click on the offline Sensor card, and on the Sensor details page, click 'Hub is not connected' to consult the FAQ.</p> <p><b>If you use H1 / H2:</b> Open the App, click on the grey Sensor card, and follow the prompts to troubleshoot and resolve the issue.</p>	<h3>Precautions and Disclaimer</h3> <h4>Precautions for Use</h4> <p>To ensure the normal use of the product, please pay attention to the following situations:</p> <ul style="list-style-type: none"> <li>It is recommended to install the Hub in a high place.</li> <li>Do not expose the Device to high temperatures, humidity, or dusty environments.</li> <li>Do not place the Device near flammable materials.</li> <li>Do not put heavy objects on the Device or use it as a support.</li> <li>Children should not use the Device without adult supervision.</li> </ul>
Indicator light status	Button operation	Function																
The blue light remains steady	Press and hold for 3s, then release	Enter Setup mode																
The red light briefly illuminates and then extinguishes	Press and hold for more than 15s, then release	Restore default settings and restart																
The blue light flashes once	Press the button once	MS1 reports data																

<h3>Disclaimer</h3> <p>The contents about how to use the product and the App guidance are only for reference; please refer to the actual situation for specific applications. If there is something different from the instructions during using the product, please contact MOCREO Support for updates.</p> <p>This product is for detecting and monitoring only. MOCREO is not responsible for any property damage or other consequences of the use of this product.</p>	<h3>FCC Statement</h3> <p>FCC ID (Sensor): 2BFZL-MS1</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <ul style="list-style-type: none"> <li>This device may not cause harmful interference.</li> <li>This device must accept any interference received, including interference that may cause undesired operation.</li> </ul> <p><b>Warning:</b> Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p><b>Note:</b> This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC Rules.</p>	<p>These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.</p> <p>However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p>	<ul style="list-style-type: none"> <li>Increase the separation between the equipment and the receiver.</li> <li>Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.</li> <li>Consult the dealer or an experienced radio/TV technician for help.</li> </ul>	<h3>Warranty</h3> <p>MOCREO products enjoy a 12-month limited warranty (starting from the date when the customer receives the product), which applies only to hardware components of the device that are not subject to accident, misuse, neglect, fire, or other external causes, alterations, or repair.</p>	<h3>Customer Service</h3> <p><a href="https://doc.mocreo.com/">https://doc.mocreo.com/</a></p> <p>+1 (530) 988-8608</p> <p>help@mocreo.com</p>  <p><b>YouTube</b> MOCREO Sensor </p> <p>Search [ MOCREO ] on YouTube to watch the setup video tutorials.</p>
--	---	--	--	--	--